

COMMERCIAL ETHERNET SWITCH FR-5A3010P

Main Features

- 10×10/100/1000BASE-T RJ45
- Port 1-8 support PoE+ Standard
- 0°C to +50°C Operating Temperature
- External 120W power adapter Included



Overview


- Stable Ethernet Transmission
- High-quality Design
- Heat Resistant
- Repels Dust
- Reliable Ethernet



Specifications

Hardware Features	
Product	FR-5A3010P
RJ45 Ports	10×10/100/1000BASE-TX RJ45
Switching Capacity	52Gbps
Packet Buffer Size	4M bits
Cable Type (Fiber)	Multimode 50/125µm, 62.5/125µm Single-mode 9/125µm
Cable Type (Copper)	Cat5/5e/6
Dimensions	220*108*28 mm (L*W*H)
Operating Temperature	0°C~50°C (32to 122 °F)
Storage Temperature	-20°C~70°C (-4 to 158 °F)
Max Power Per Port	30W @PoE+ Model 90W @PoE++ Model
PoE Port	Port 1 to 8 IEEE802.3af/at @PoE+ (FR-5A3208P/FR-5A3010P) Port 1 to 8 IEEE802.3af/at/bt @PoE++ (FR-

Dimensions

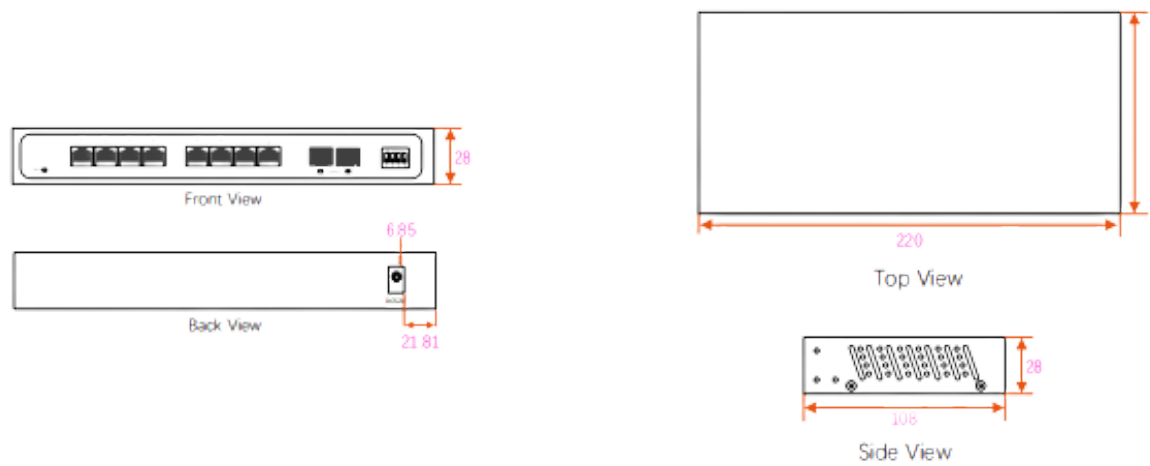

Address:
 B-G-3A, Endah Promenade No. 5,
 Jalan 3/149E, Taman Sri Endah,
 Sri Petaling, 57000 Kuala Lumpur.

018-3366566
 Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my