

FIBERROAD COMMERCIAL ETHERNET SWITCH FR-5A3208P

Main Features

- 8×10/100/1000Base-T (PoE+ Standard)
- 2x1000Base-X SFP
- 0°C to +50°C Operating Temperature
- External 120W power adapter Included



Overview

- Heat Resistent
- Repels Dust
- Reliability



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features		
Product	FR-5A3010P	FR-5A3208P
RJ45 Ports	8x10/100/1000Base-TX + 2x10/100/1000Base-Tx	8x10/100/1000Base-TX
Fiber Ports	2x1000Base-X(SFP)	
Transmission Mode	Store and Forward (Full Wire Speed)	
Dimensions	220*108*28 mm (L*W*H) 8.7*4.25*1.10 in (L*W*H)	
Operating Temperature	0°C~50°C (32to 122 °F)	
Operating Humidity	5%~90% (non-condensing)	
Storage Temperature	-20°C~70°C (-4 to 158 °F)	
PoE Port	Port 1 to 8 IEEE802.3af/at @PoE	
Input Voltage	125W(DC52V) @ 15.4W 240W(DC52V) @ 30W	

Dimensions

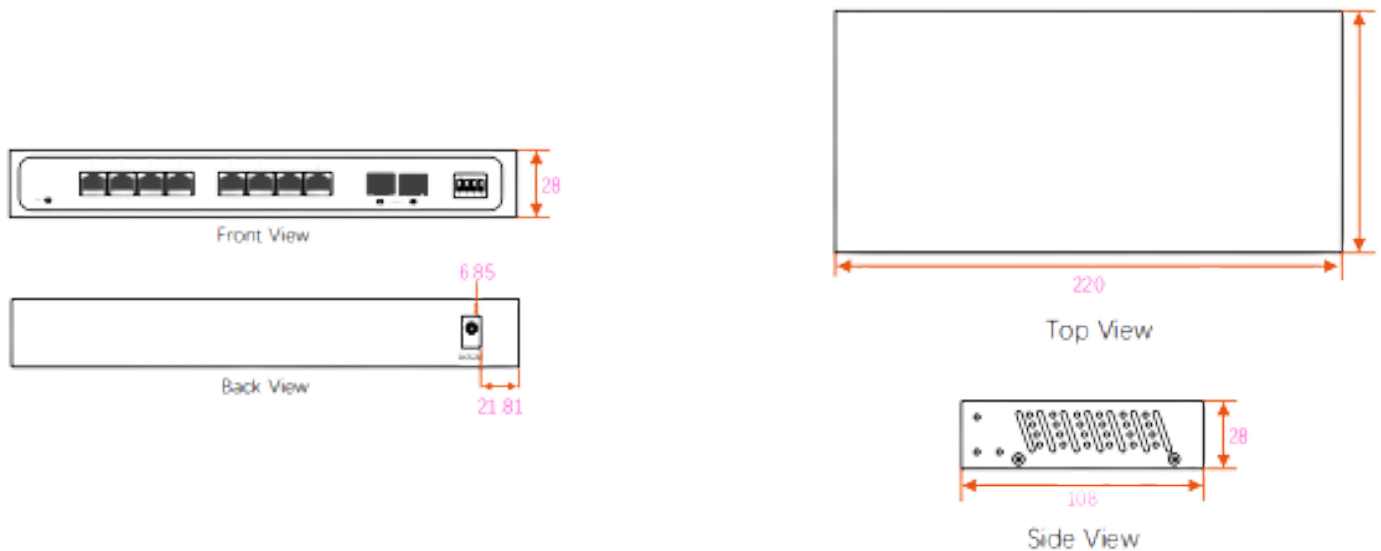

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my