

FIBERROAD
COMMERCIAL ETHERNET
SWITCH
FR-5A3216P

Main Features

- 16×10/100/1000BASE-T RJ45,
- 2×1000BASE-X SFP
- 0°C to +50°C Operating Temperature
- 400W power adapter Included
- AC100-240V Power Input
- Compatible With IEEE 802.3at/af Compliant PDs
- Up to 250m PoE power supply and data transmission
- Priority Mode Isolation Mode
- PD Detection
- Mac Address Auto-Learning and Auto-Aging



Overview

- Stable Ethernet Transmission
- High-quality Design
- Heat Resistant
- Repels Dust



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinelssystems.com.my

Specifications

Hardware Features	
Product	FR-5A3216P
RJ45 Ports	16x10/100/1000Base-TX
Opticla Fiber Port	2x1000Base-X SFP
Exchange Property	Delay time: < 7μs Backplane bandwidth: 52Gbps
PoE Port	Port 1 to 16 IEEE802.3af/at @PoE
Max Power Per Port	30W; IEEE802.3af/at
Dimensions	400*300*45 mm
Operating Temperature	0°C~50°C (32to 122 °F)
Storage Temperature	-20°C~70°C (-4 to 158 °F)

Dimensions

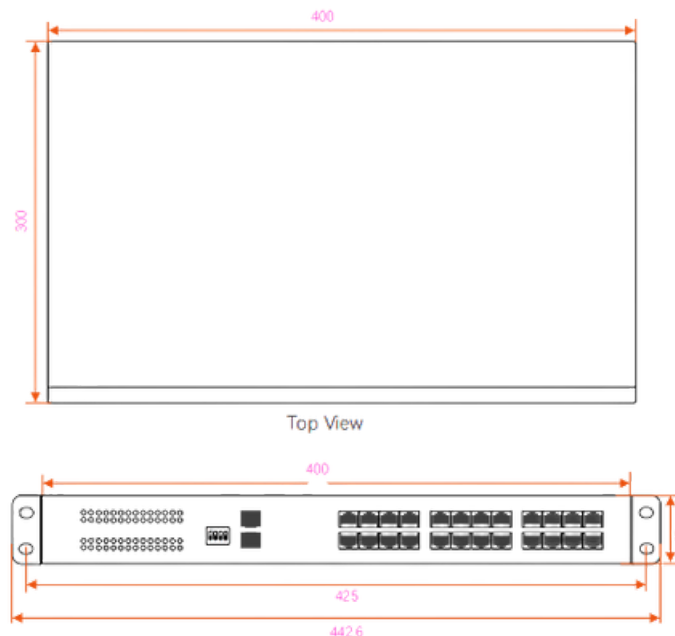

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my