

FIBERROAD
COMMERCIAL ETHERNET
SWITCH
FR-5A3224P

Main Features

- 24×10/100/1000BASE-TX RJ45
- 2×1000BASE-X SFP
- 0°C to +50°C Operating Temperature
- Internal 400W power adapter Included
- AC100-240V Power Input
- Electric 4kV surge protection
- Fanless and noiseless design, IP30 rated
- Plug and play, no configuration, simple and convenient
- Providing a long term and stable PoE power output



Overview

- Stable Ethernet Transmission
- High-quality Design
- Heat Resistant
- Repels Dust
- Reliability



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-5A3224P
Optical Fiber Port	2x1000Base-X SFP
Exchange Property	Delay time: < 7μs Backplane bandwidth: 52Gbps
PoE Port	Port 1 to 24 IEEE802.3af/at @PoE
Max Power Per Port	30W; IEEE802.3af/at
Power Supply	Internal power adapter with AC100 – 240V 50-60Hz input
Dimensions	400*300*45 mm
Operating Temperature	0°C~50°C (32to 122 °F)
Operating Humidity	5%~90% (non-condensing)
Storage Temperature	-20°C~70°C (-4 to 158 °F)

Dimensions

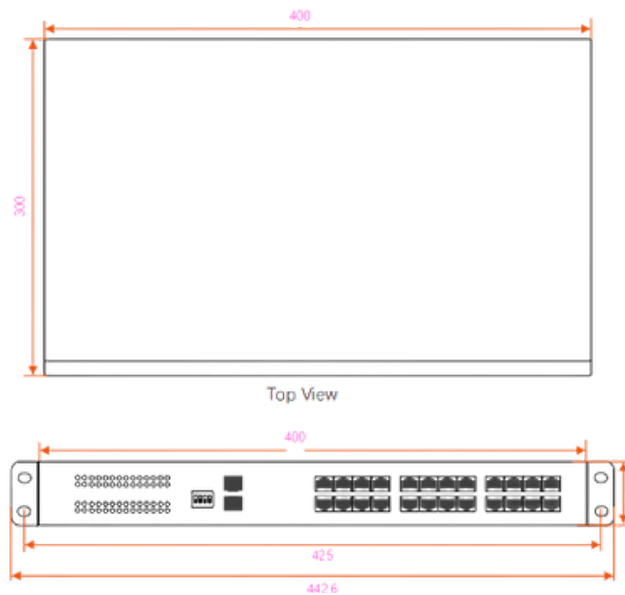

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my