

FIBERROAD COMMERCIAL ETHERNET SWITCH FR-5M3208

Main Features

- 8x10/100/1000BASE-T Gigabit Ethernet RJ45.
- 2x100/1000BASE-X SFP ports for SFP Type auto detection.
- Optionally support IEEE 802.3 af/at/bt Power Over Ethernet Standard.
- Full gigabit L2+ management, easy to manage the network by CLI/WebGUI/NMS.
- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full duplex).
- Build up a redundant industrial network with STP/RSTP/MSTP/ERPSv2.
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning.
- Traffic Classification Based on IEEE 802.1p, CoS, WRR, and Strict Mode.
- SNMPv1/v2c/v3 for different levels of network management.



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystem.com.my

Specifications

Hardware Features			
Product	FR-5M3208	FR-5M3208P	FR-5M3208BT
Copper Ports	8x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-8)		
Fiber Ports	2x100/1000BASE-X SFP Slots (Port 9 and Port 10)		
Console	1x RJ45-to-RS232 Serial Port(115200)		
RAM	128Mbyte		
FLASH	32MByte		
Reset Button	<5 sec: System Reboot; >10 sec: Factory Default		
Surge Protection	±6kV DC, ±4kV RJ45	±6kV DC, ±6kV RJ45	
Enclosure	IP30 Metal		
Installation	19inch Rack Mount or Desktop		
Dimension	208mmx140mmx45mm		
Switching			
Switch Architecture	Store-and-Forward		
Switch Fabric	36Gbps/non-blocking		
Forwarding Rate	11.9Mpps(64-byte packet size)		
Packet Buffer Size	4 Mbits		
Maximum Packet Length	10K bytes		
MAC Address Table	8K entries, automatic source address learning and aging		
Flow Control	IEEE 802.3x pause frame for full duplex, Back pressure for half duplex		



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my

Power Supply & Power over Ethernet			
Power Input	1		
Input Voltage	AC 100-240V, 50/60Hz 0.15A		
Power Consumption	12 Watts Max (without PoE Load)		
PoE Ports	\	Port 1 to 8 IEEE802.3 af/at	Port 1 to 8 IEEE802.3 af/at/bt
PoE Power Supply Type	\	End-span	End-span
Power Supply Pin	\	1/2(+), 3/6(-)	1/2(+), 3/6(-) or 4/5(+), 7/8(-)
Max Power Per Port	\	30W	90W
PoE Power Budget	\	120W (Default)	120W (Default)
Environmental			
Operating Temperature	0 °C to 50 °C		
Storage Temperature	-20°C to 70°C		
Operating Humidity	5%~95% (non-condensing)		
MTBF	147,595 hours (Non-PoE Models) 126,424 hours (PoE Models) @MIL-HDBK-217F GB		
Heat Dissipation	41 BTU/h (non-PoE mode) 758 BTU/h (with 240W PoE load)		
Cooling	Passive Cooling, Fanless Design		
Noise Level	0 dBA		



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my

Software Features	
Port Configuration	Port(Admin Status) disable/enable Copper Port: Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Fiber Port: 100M/1000M speed selection Flow Control disable/enable Power saving(EEE) disable/enable
Port Status	Display each ports' speed duplex mode, link status, flow control status, auto negotiation status, Fiber Port Information, Port Traffic
Port Mirroring	Source Ingress/ Egress Port/ Both, Many-to-1 monitor
VLAN	Up to 4K VLAN groups, out of 4094 VLAN IDs IEEE 802.1Q tag-based VLAN IEEE 802.1AD Q-in-Q tunneling(Double VLAN) GVRP(Generic VLAN Registration Protocol)
Link Aggregation	IEEE 802.3ad LACP/Static trunk Supports 6 trunk groups with 4 ports per trunk
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol
Multicast	Dynamic/Static Multicast groups IGMP Snooping v1,2,3 Port-based IGMP Snooping Fast Leave GMP Querier
Rate Limitation	Per Port Rate Limitation Ingress: 16-1000000 kbps/Egress: 16-1000000 kbps
Ring	ITU-T G.8032 ERPS, Recovery time<10ms
QoS	Traffic classification based, strict priority and WRR 8-level priority for switching -Port number -802.1p priority -802.1Q VLAN tag -DSCP/TOS field in IP Packet



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystem.com.my

ACL	IP-based ACL/MAC-based ACL ACL based on: -MAC Address -IP Address -Ethertype -Protocol Type -VLAN ID -DSCP -802.1p Priority
Security	Port Security Static MAC address IEEE 802.1x port-based network access control RADIUS authentication DHCP Snooping, DHCP option 82
PoE Management Functions	
PoE System Management	PoE Port status monitoring Total PoE power budget control PoE usage threshold and temperature threshold PoE port Priority PoE mode(PoE/PoE+/PoE++) PD reboot(Zero Traffic Duration)
PoE Schedule	Absolute/Periodic Mode
Layer 3 Functions	
IP Interfaces	Max. 8 VLAN interfaces
Routing Table	Max.32 routing entries
Routing	IPv4 software static routing
Management	
Basic Management Interface	Console; Telnet; Web browser; SNMPv1/v2c
Secure Management Interface	SSHv2, TLSv1.2, SNMPv3
System Management	Firmware Upgrade by HTTP protocol through Ethernet network Configuration upload/download through HTTP Remote syslog, System log LLDP protocol, SNTp PREVIEW NMS Alarm(Relay, Led, Temperature, Trap, Power)



Address:
 B-G-3A, Endah Promenade No. 5,
 Jalan 3/149E, Taman Sri Endah,
 Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystems.com.my

LED	State	Description
PWR	ON OFF	Power is being supplied. Power is not being supplied.
RUN	Blinking OFF	The system is running well. The system is running unwell.
FAIL(Only For PoE)	ON OFF	PoE Status is abnormal. PoE Status is normal.
MAX(Only For PoE)	ON OFF	Total PoE Power out of maximum power budget. Total PoE Power under maximum power budget.
R.O.	ON OFF	Ring owner. Not Ring Owner.
RING	ON OFF	Ring is enabled. Ring is disabled.
Link/ACT (1-10)	ON Blinking OFF	Port connection is active Data transmitted. Port connection is not active.
RJ45 Port Speed	ON OFF	1000M is running. No 1000M is running.
ALM	ON OFF	Has alarm information. No alarm information.

Package Contents	
Device	1x Ethernet Switch
Cable	1xDB9 female to RJ45 10-pin AC Power Cable (Regional Power Plug)
Installation Kit	2x Rack-Mount Kits
Documentation	1 x Quick start guide 1 x Warranty card



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566




Sentinel Systems Sdn Bhd




sales@sentinelssystems.com.my


Dimensions

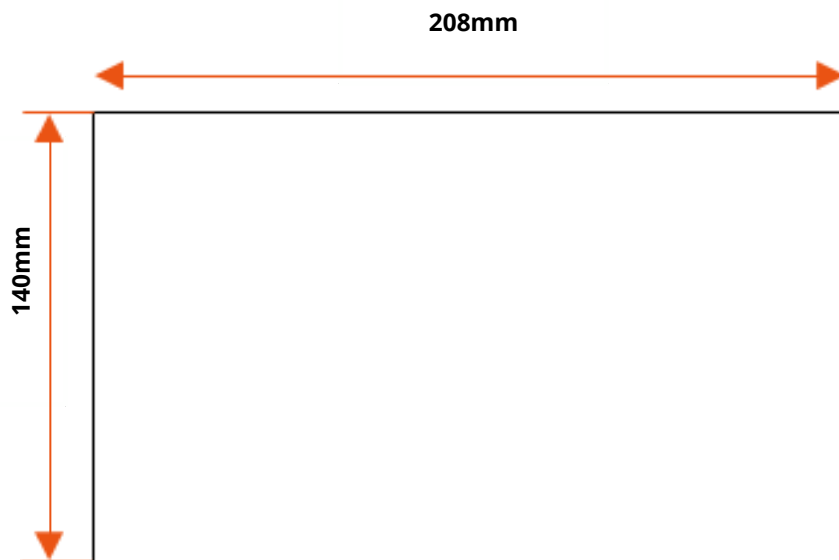

Top View

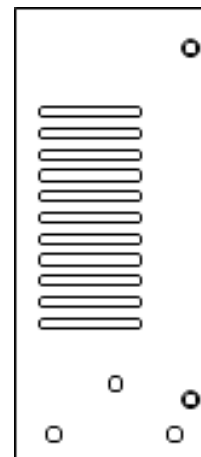

Side View

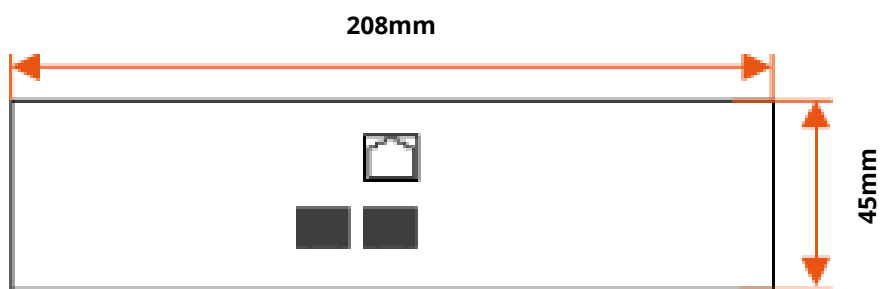

Front View



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my

Accessories (Sold Separately)

Power Supply	
FR-I-60-24	DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-120-48	DIN-rail 48-58V VDC power supply with 120W/1.2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-240W-48	DIN-rail 48-55V VDC power supply with 240W/2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-480W-48	DIN-rail 48-55V VDC power supply with 480W/4A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
SFP Optical Transceiver	
FRSX-1L311C-I	1.25Gb/s 1310nm 10km SFP, operation temperature range of -40°C-85°C(-40°F - 185°F)
FRSX-1L341C-I	1.25Gb/s 1310nm 40km SFP, operation temperature range of -40°C-85°C(-40°F - 185°F)
FRSX-1L5X1C-I	1.25Gb/s 1550nm 80/100km SFP, operation temperature range of -40°C-85°C(-40°F - 185°F)
FRSX-1L3523/5323C-I	1.25Gb/s 1310nm/1550nm 20km BiDi SFP, operation temperature range of -40°C-85°C (-40°F - 185°F)
Armored Fiber Patch Cable / LAN Cable	
FRPC-A-LC	Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m
FRLC-A-CAT6	Armored Cat6 Snagless shielded(S/FTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystem.com.my

Order Information

Model Number	10/100/1000 Base-T RJ45	100/1000 Base-X Port	PoE Standard	Input Voltage	Operating Temp.
FR-7M3208	8	2	\	2xDC9-56V	-40 to +75°C
FR-7M3208A	8	2	\	1xAC220V	-40 to +75°C
FR-7M3208P	8	2	Port 1-8 802.3 af/at	2xDC9-56V	-40 to +75°C
FR-7M3208BT	8	2	Port 1-8 802.3 af/at/bt	2xDC9-56V	-40 to +75°C

Shipping

Model No.	FR-7M3208L/LA	FR-7M3208P/FR-7M3208BT
Classification Codes	HS Code: 851762	
	HTS: 8517.62.00	
NDAA Compliant	Yes	
Individual Gross Weight	0.84kg	0.86kg
Individual Package Dimension	201x171x73mm	
Package Quantity	20 Units	
Package Gross Weight	16.8kg	17.2kg
Package Dimension	422x385x375mm	



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystems.com.my