

FIBERROAD COMMERCIAL ETHERNET SWITCH FR-5M3208P

Main Features

- 8x10/100/1000Base-T RJ45 (PoE+ Standard)
- 2x1000Base-X SFP
- 0°C to +50°C Operating Temperature
- 120W power adapter Included
- AC100-240V Power Input
- QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR&SP+WRR



Overview

- Stable Ethernet Transmission
- High-quality Design
- Heat Resistant
- Repels Dust



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-5M3208P
Ports	2×Uplink Gigabit SFP 8×10/100/1000M Base-TX RJ45
SFP Port Transmission	Multi-mode: 850nm/0-500M, Single-mode:1310nm/0-40km,1550nm/up to 120km
Transmission Mode	Store and Forward (full/half duplex mode)
Exchange Property	Delay time: < 7μs Backplane bandwidth: 20Gbps; Packet Forwarding Rate:14.88Mpps
Dimensions	208mm*140mm*45mm
Operating Temperature	0°C~50°C (32to 122 °F)
Operating Humidity	5%~90% (non-condensing)
Storage Temperature	-20°C~70°C (-4 to 158 °F)
Advance Layer 2+ Features	IPv4/IPv6 Management Static Route

Dimensions

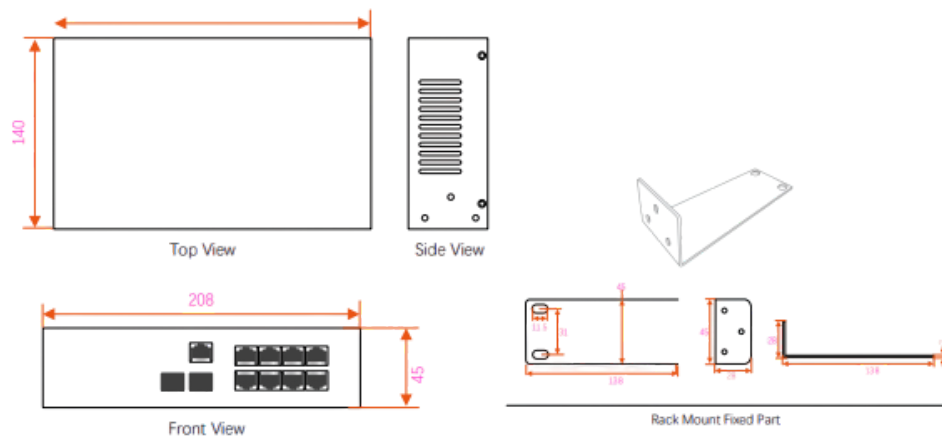

Note: Rack Mount Fixed Part are sold Separately.



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my