

COMMERCIAL ETHERNET SWITCH

FR-5M3224

Main Features

- 24×10/100/1000Base-T RJ45
- 4×1000Base-X Uplink Combo Gigabit SFP/RJ45+
- °C to +50°C Operating Temperature
- AC100-240V Power Input
- Supports SNMP and FIRO NMS management platform



Overview


- Flexible Management
- Simplifying Configuration
- High Performance
- Future-proof Networking Solution



Specifications

Hardware Features	
Product	FR-5M3224
Coppre Ports	24x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-24)
Fiber Ports	2x100/1000BASE-X SFP Slots (Port 25 -Port 26)
Console	1x RJ45-to-RS232 Serial Port(115200)
Transmission Mode	Store-and-Forward
Input Voltage	AC 100-240V, 50/60Hz 0.15A
Power Consumption	15 Watts Max(without PoE load)
Dimensions	440mm*300mm*45mm
Operating Temperature	0 °C to 50 °C
Humidity	5% to 90% (non-condensing)
Storage Temperature	20°C to 70°C

Dimensions

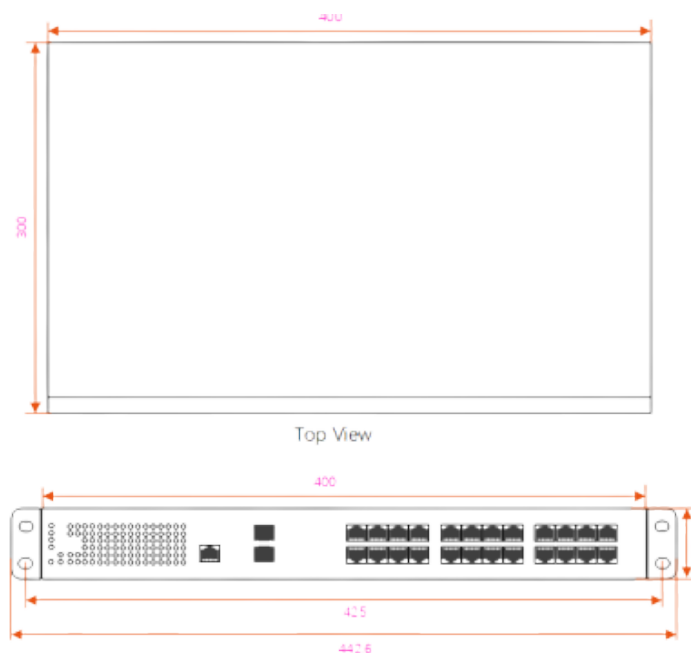

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my