


COMMERCIAL ETHERNET SWITCH

FR-5M34F8

Main Features

- Layer 2 Managed Network Switch
- 8×10/100/1000Base-T RJ45
- 16×1000Base-X SFP Slots
- 4xGigabit SFP/RJ45 Combo Ports
- 0°C to +50°C Operating Temperature
- 1xAC100-240V Power Input



Overview


- Flexible Management
- Enhanced Security Features
- High Performance
- Future-proof Networking Solution



Specifications

Hardware Features	
Product	FR-5M34F8
Coppre Ports	8x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 17-24)
Fiber Ports	16x100/1000BASE-X SFP Slots (Port 1 -Port 17) 4x100/1000BASE-X SFP Slots (Port 25 -Port 28) / 4x10/100/1000BASE-T RJ45 Combo Port
Console	1x RJ45-to-RS232 Serial Port(115200)
Switch Architecture	Store-and-Forward
Input Voltage	AC 100-240V, 50/60Hz 0.15A
Power Consumption	15 Watts Max(without PoE load)
Dimensions	440mm*300mm*45mm
Operating Temperature	0 °C to 50 °C
Storage Temperature	20°C to 70°C
Heat Dissipation	102 BTU/h (non-PoE mode) 1672 BTU/h (with Max PoE load)

Dimensions

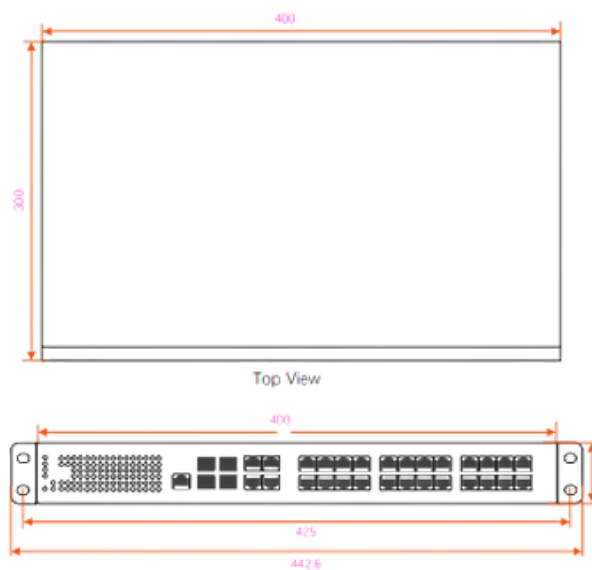

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my