

FIBERROAD
MINI Media Converter
FR-2201

Main Features

- 1x 10/100Base-TX+1x 100Base-X SFP Slot,
- 0°C~50°C Operating Temperature, DC5-12V, Included External Power Supply
- Transmission of Up to 20KM
- Dip Switches for Customized Configuration



Overview


- Built-in LFP Technology
- Extra-long Packets Up to 1.6KB
- Transfer Data From 10/100 Base-tx Copper to Fiber Interfaces
- Support Low-Time Lag Transmission



Specifications

Hardware Features	
Product	FR-2201
RJ45 Ports	10/100Base-T
Fiber Ports	100M SFP or 1x9 Module
Operating Humidity	5% RH ~ 90% RH
Operating Temperature	-10°C ~ 55°C
Data Rate	100Mbps
Dimensions	94 x 70 x 25 mm

Dimensions

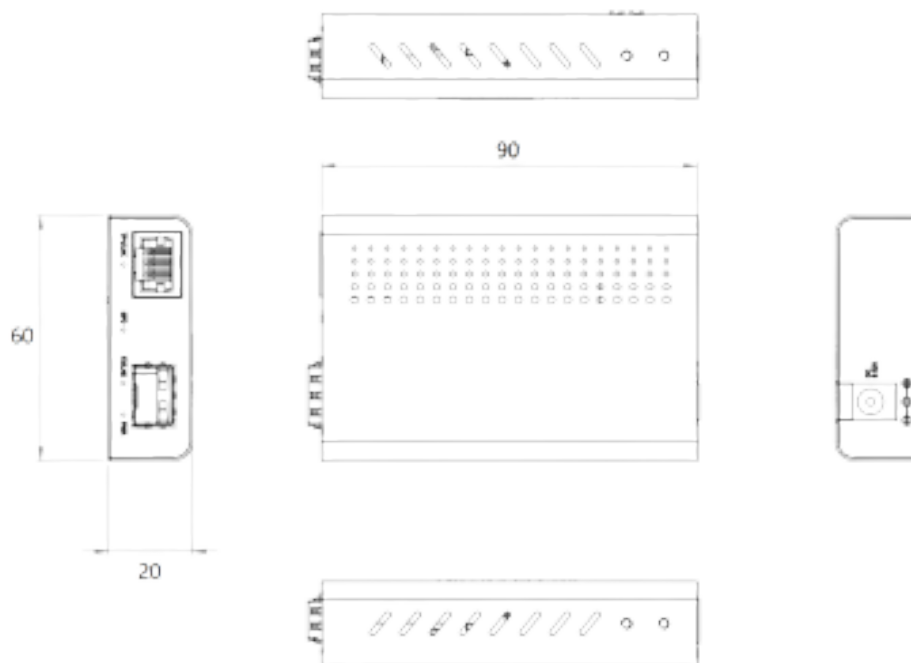

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my