

## FIBERROAD MINI Media Converter FR-2203

### Main Features

- 1x 10/100/1000Base-T+1x 1000Base-X SFP Slot,
- 0°C~50°C OT, DC5-12V, Included External Power Supply
- Fixed Full-Duplex on Fiber



### Overview


- Auto-Negotiation
- Quick status information
- DIP Switch to Set Different Configuration
- Compact Package Size



# Specifications

| Hardware Features          |                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------|
| Product                    | FR-2203                                                                                   |
| Store nada Forward Mode    | 1518Bytes                                                                                 |
| Pass Through Mode          | 9KBytes                                                                                   |
| Connector                  | One UTP RJ-45 connector, one SC/ST/FC/SFP connector, one DC-inlet connecto                |
| Operation Mode             | Full duplex or half duplex mode                                                           |
| Power Requirement          | Operating Voltage DC 5~12V Rated Current: 0.5/0.25A<br>Power Consumption: Full-load<3W    |
| Environemental Requirement | Operating Temperature: 0°C~50°C Storage Temperature: -10°C~70°C Relative Humidity: 5%~95% |
| Dimensions                 | 95mm(D)×60mm(W)×20mm(H) Weight:                                                           |
| Emission                   | FCC Class A, CE Class A                                                                   |

# Dimensions

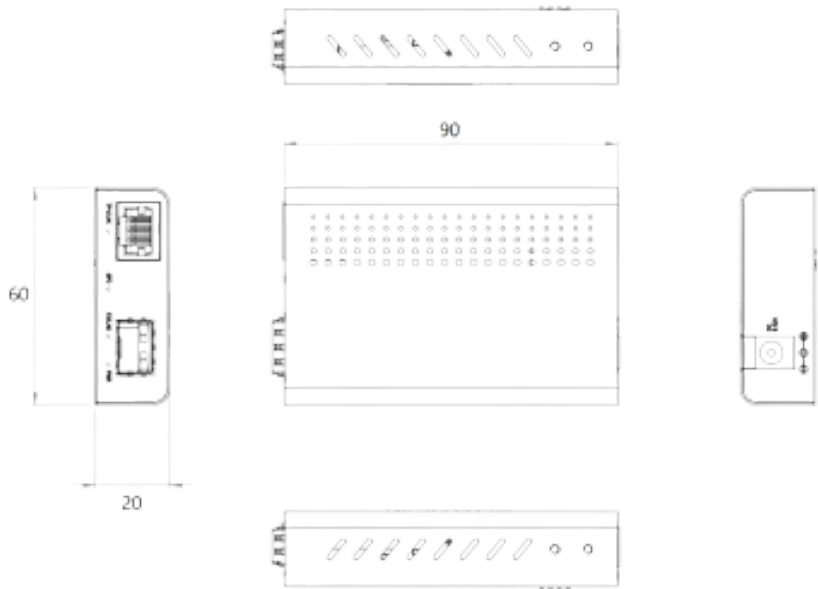

Address:  
B-G-3A, Endah Promenade No. 5,  
Jalan 3/149E, Taman Sri Endah,  
Sri Petaling, 57000 Kuala Lumpur.

018-3366566  
Sentinel Systems Sdn Bhd  
sales@sentinelssystems.com.my