


FIBERROAD

MINI Media Converter

FR-2206

Main Features

- 2x 10/100/1000Base-T+1x 1000Base-X SFP Slot
- -0°C~50°C OT, DC5-12V, Included External Power Supply
- Automatic Link Restoration
- Connect to legacy network equipment
- Eliminate Collision Domains

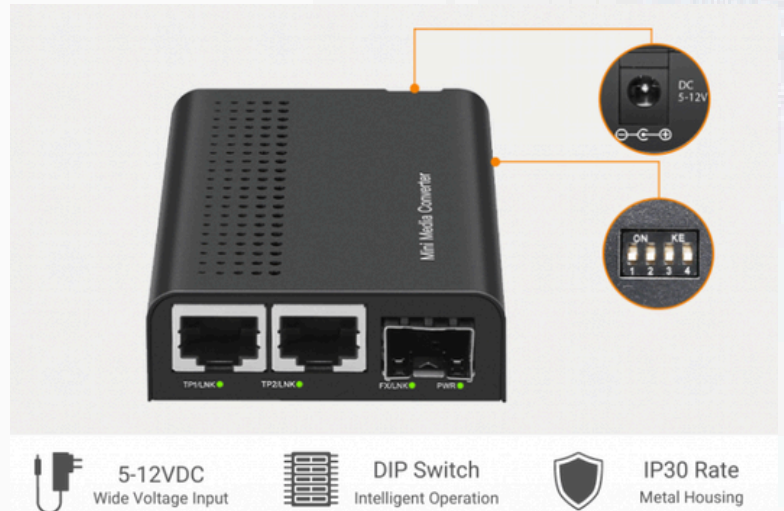

Overview

- LAN Extension
- Maintain Investment of Existing Equipment
- Protect Interference Data
- Speed Conversion
- Reliable Data Transmission




Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinelssystems.com.my

Specifications

Hardware Features	
Product	FR-2206
Transmission Mode	Store and Forward
DIP Switches	Forward mode setting Fiber Speed: FX 100M/1000M
Connector	Two UTP RJ-45 connector, one SFP, one DC-inlet connector
Operation Mode	Full duplex or half duplex mode
Power Requirement	Operating Voltage DC 5~12V Consumption: Full-load<3W
Environmental Requirement	Operating Temperature: 0°C~50°C Storage Temperature: -10°C~70°C Relative Humidity: 5%~95%
Dimensions	90mm(D)×60mm(W)×20mm(H)
Emission	FCC Class A, CE Class A

Dimensions

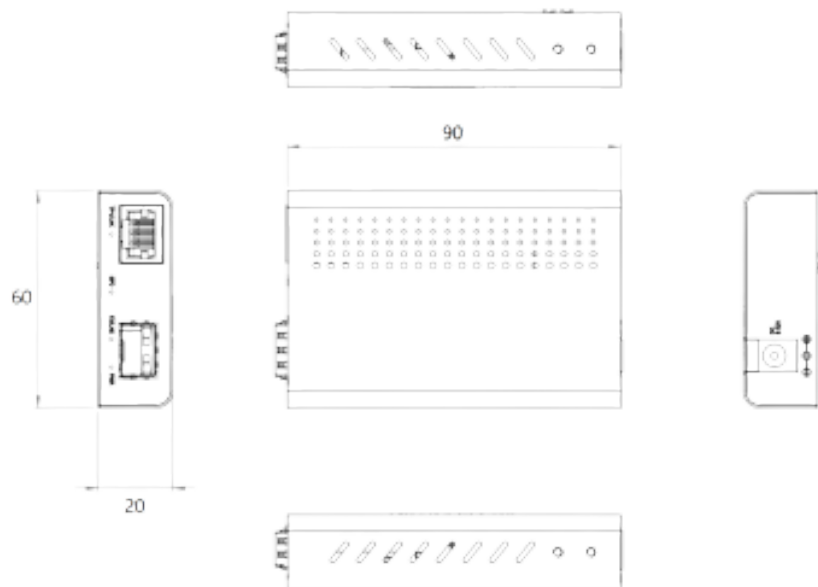

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my