

Industrial Media Converter

FR-2703

Main Features

- 1×10/100/1000Base-T RJ45 +
1×1000Base-X SFP Slot, -30°C~+70°C
OT, 12VDC Power Input
- DIP-switch to Set Different Configuration
- Plug & Play – no need for any user
configuration
- Full/Half Duplex, Auto-Negotiation and
Auto-MDI/MDIX
- Robust IP40 Aluminium Metal Enclosure
for Harsh Environments



Overview


- Cost Effective
- Compact Size
- High-efficiency External Power
- Heat Resistent
- Repels Dust



Specifications

Hardware Features	
Product	FR-2703
Ports	1x10/100/1000Base-T RJ45 1x1000Base-X SFP
Copper Port	100m (using standard CAT5/CAT5e cable)
Fiber Port	Depends on optical module(0-160km)
Transmission Mode	Store and Forward (full/half duplex mode)
Input Power	DC12V or DC24V or AC24V
Power Consumption	2.4W Max. 0.2A@12VDC
Dimensions	36.2mm*117mm*24.5mm
Operating Temperature	-40°C to +75°C
Humidity	5% to 90% (non-condensing)
Storage Temperature	-30°C to +85°C (-30 to 185 °F)

Dimensions

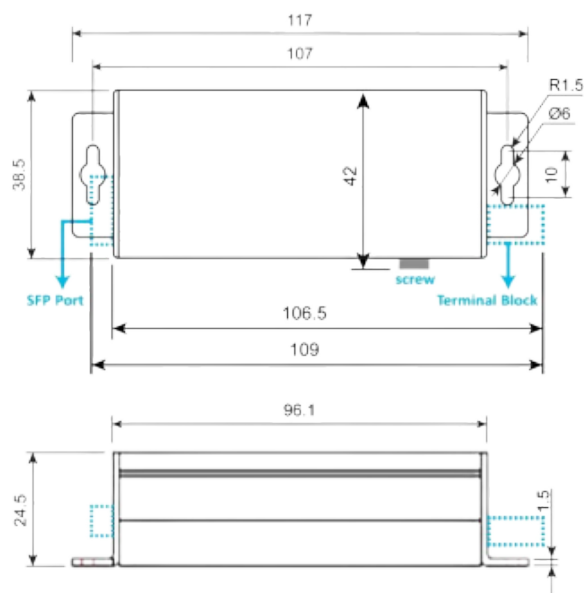

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my