

Industrial Media Converter

FR-6101I

Main Features

- 1×10/100/1000Base-T RJ45
+1×1000Base-X SFP Slot
- -40°C~+75°C OT, 9-56VDC Redundant
dual inputs, Web Management
- Supports flow control Enable or Disable
- Firmware upgrade via Web
- Remote power failure detection on
standalone



Overview

- Cost Effective
- High-efficiency External Power
- Heat Resistent
- Repels Dust



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6101I
Ports	1x10/100/1000Base-TX RJ45 ports, 1x100/1000Base-FX SFP/SC
PoE Ports	N/A
Transmission Mode	Store and Forward (full/half duplex mode)
SFP Port	Depends on optical module(0-160km)
Power Consumption	5 Watts Max(without PoE load)
Dimensions	120mm x 90mm x 35mm (L x W x H)
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Humidity	5% to 90% (non-condensing)
Heat Dissipation	34 BTU/h (non-PoE mode)

Dimensions

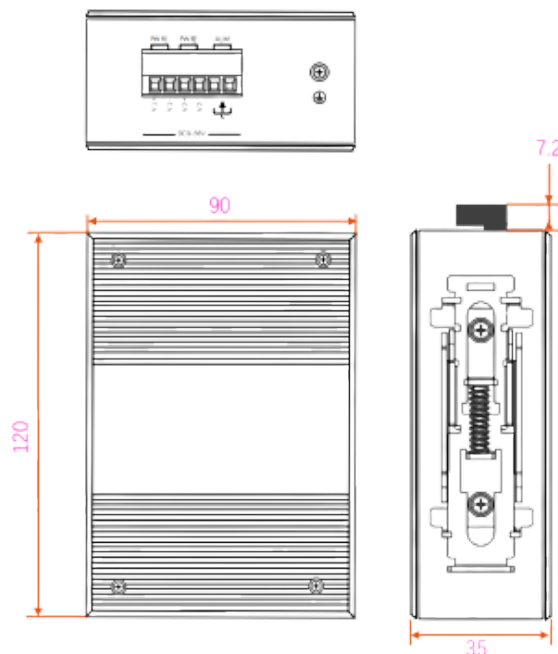

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my