

Industrial Media Converter

FR-6104I

Main Features

- 4×10/100/1000Base-T RJ45 + 1×1000Base-X SFP Slot
- -40°C~75°C OT, 9-56VDC Redundant dual inputs, Web Management
- Supports Link Fault Pass-Through(LFPT)Function
- Support Auto Laser Shutdown(ALS) Function(Centralized Management Only)
- Support SNMP, Web Management



Overview

- Cost Effective
- High-efficiency External Power
- Heat Resistent
- Repels Dust



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6104I
Ports	4x10/100/1000Base-T RJ45 ports, 1x1000Base-X SFP/1x9
PoE Ports	Port 1 to 4 IEEE802.3af/at @PoE+
Exchange Property	Delay time : < 7μs Switching Capacity : 12Gbps
Transmission Mode	Store and Forward (full/half duplex mode)
SFP Port	Depends on optical module(0-160km)
Power Consumption	3 Watts Max(without PoE load)
Dimensions	120mm x 90mm x 35mm (L x W x H)
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Humidity	5% to 90% (non-condensing)
Storage Temperature	-40°C~85°C (-40 to 185 °F)

Dimensions

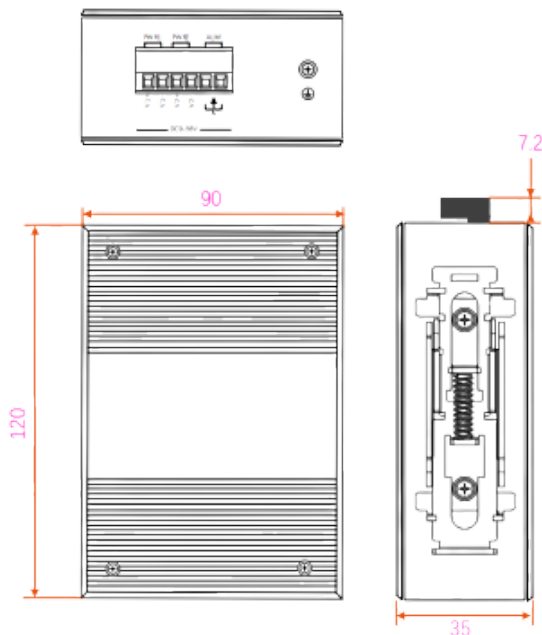

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my