


SEMI-INDUSTRIAL ETHERNET SWITCH

FR-6N1101

Main Features

- 1x10/100BASE-TX
RJ45+1x100BASE-X SFP Slot
- -30°C~70°C OT
- Dual DC9-56V
- LED Indicates Diagnostic
- Optionally support LC/SC/ST/FC
Connector

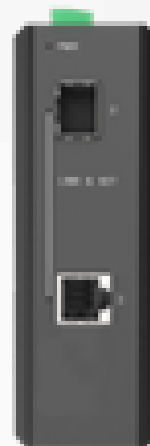

Overview

- Space Savings
- Reliability and Stability
- Heat Resistent
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6N1101
Copper Ports	1x10/100Base-TX RJ45 port
SFP Slot	1x100Base-FX (LC/SC/FC/ST connectors option)
Power Connector	1x 5 pin removable terminal
Power Consumption	2W Max(Single Power Input), 4W Max(Dual Power Input)
Dimensions	120x90x35mm
Operating Temperature	-40~75°C(-40 to 167°F)
Storage Temperature	-40~85°C(-40 to 185°F)
Heat Dissipation	7 BTU/h

Dimensions

Unit: mm

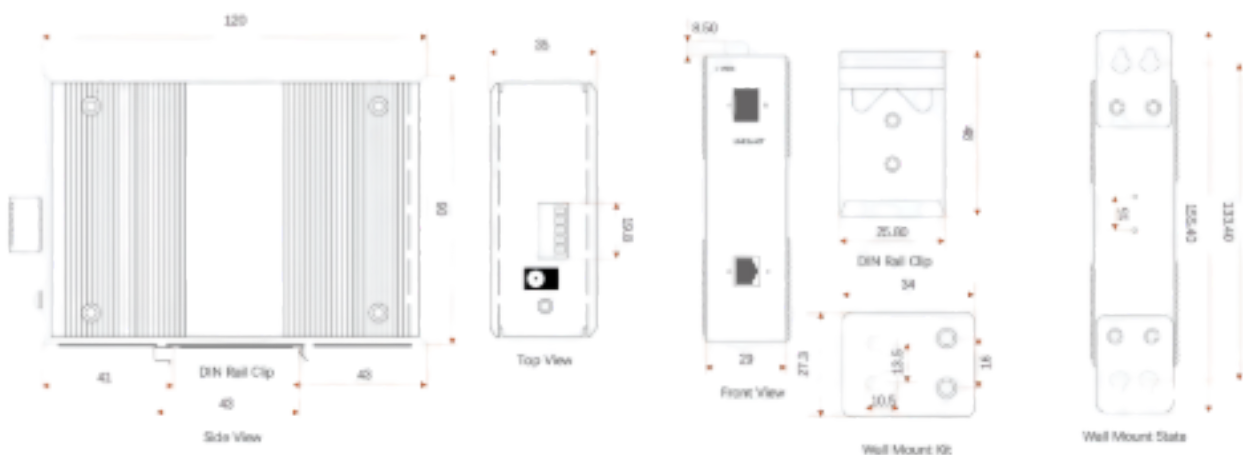

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my