

SEMI-INDUSTRIAL ETHERNET SWITCH

FR-6N1104

Main Features

- 4x10/100BASE-TX
RJ45+1x100BASE-X SFP Slot
- -30°C~70°C OT
- Dual DC9-56V
- IEEE 802.1Q VLAN Transparency
- Supports MAC address auto-learning and auto-aging



Overview

- Space Savings
- High-speed Data Transfer
- Heat Resistent
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6N1104
Copper Ports	4x10/100BASE-TX RJ45 Auto-MDI/MDI-X (Port 1-4)
Fiber Ports	1x100BASE-X SFP Slot (Port 5)
Flow Control	IEEE 802.3x pause frame for full duplex, Back pressure for half duplex
Switch Architecture	Store-and-Forward
Dimensions	120 x 90 x 35 mm
Operating Temperature	-40~75°C(-40 to 167°F)
Storage Temperature	-40~85°C(-40 to 185°F)
Power Connector	1 removable 5-contact terminal blocks Pin 1/2 for Power 1, Pin 4/5 for Power 2

Dimensions

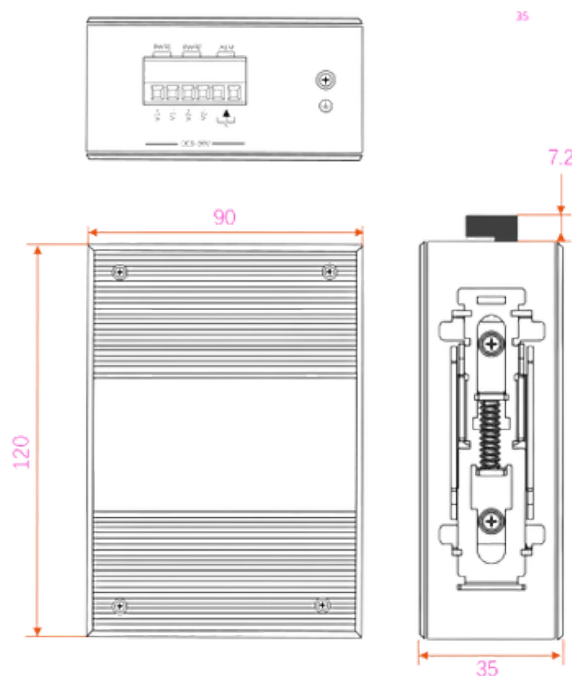

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my