


SEMI-INDUSTRIAL ETHERNET SWITCH

FR-6N3005

Main Features

- 5x10/100/1000BASE-T RJ45
- -30°C~70°C OT
- Dual DC9-56V
- Full/Half-duplex self-adaptation
- 4KV anti-static protection
- Support IEEE802.3AZ high-efficiency energy-saving technology

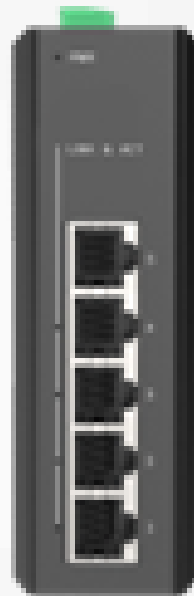

Overview

- High-speed Data Transfer
- Cost-effective
- Heat Resistant
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6N3005
Copper Ports	5x10/100/1000Base-TX Ports(RJ45 connector)
Transmission Mode	5x10/100/1000Base-TX Ports(RJ45 connector)
Exchange Property	Delay time: < 7μs Backplane bandwidth: 12Gbps
Dimensions	120mm x 90mm x35mm (L x W x H)
Operating Temperature	-20°C to + 70°C (-4 to 158 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)

Dimensions

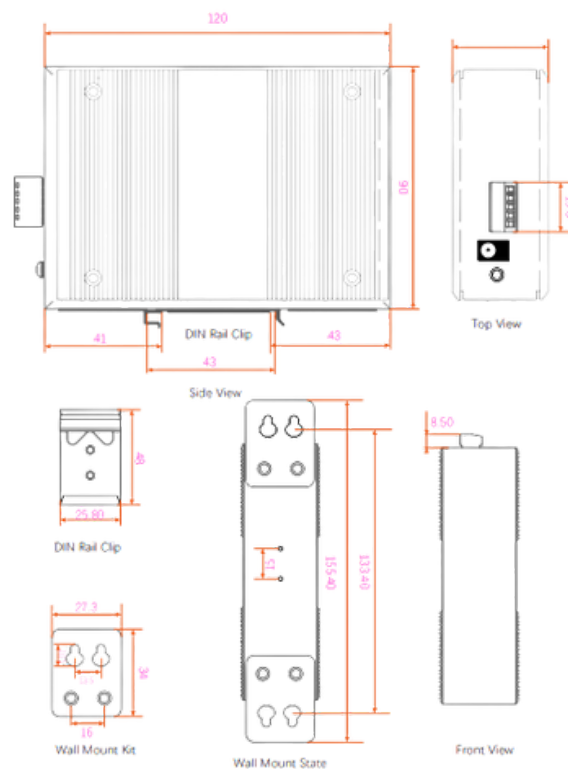

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my