


SEMI-INDUSTRIAL ETHERNET SWITCH

FR-6N3008

Main Features

- 8x10/100/1000BASE-T RJ45
- -30°C~70°C OT
- Dual DC9-56V
- Support IEEE802.3AZ high-efficiency energy-saving technology
- 4KV anti-static protection
- Support power input polarity protection

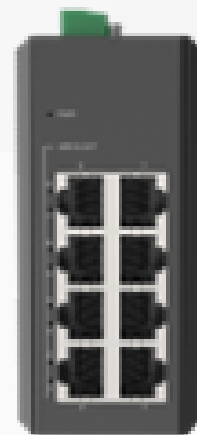

Overview

- High-speed Data Transfer
- Ease of Maintenance
- Heat Resistant
- Resilient to Extreme Conditions
- Low Power Consumption



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-6N3008
Copper Ports	8x10/100/1000Base-TX Ports(RJ45 connector)
Transmission Mode	Store and Forward (full/half duplex mode)
Exchange Property	Delay time: < 7μs Backplane bandwidth: 20Gbps
Dimensions	100mm x 78mm x40mm (L x W x H)
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)

Dimensions

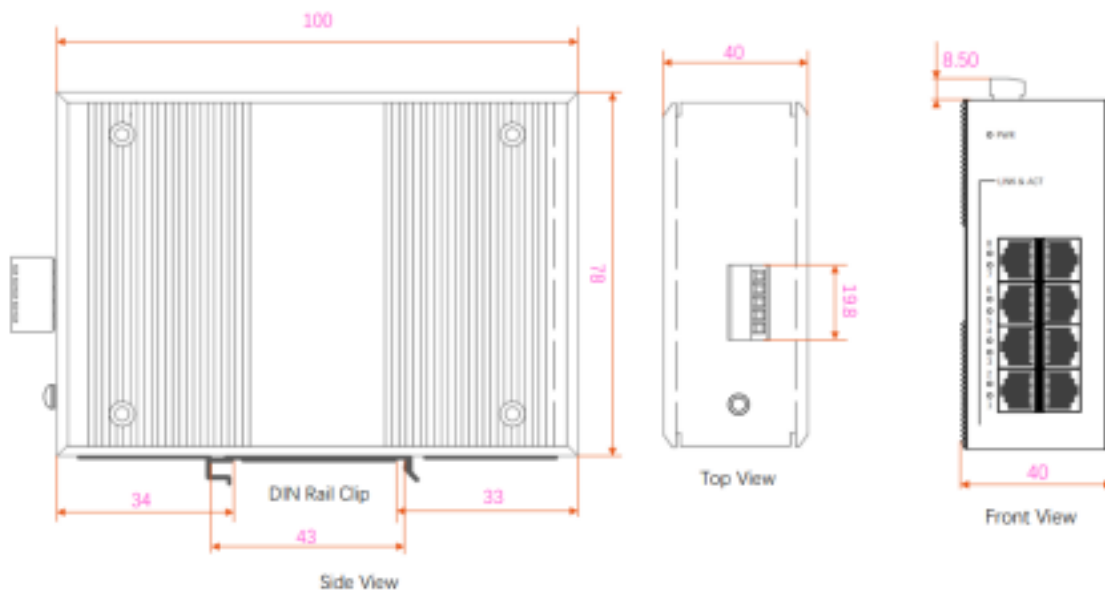

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my