


### SEMI-INDUSTRIAL ETHERNET SWITCH

FR-6N3104

#### Main Features

- 4x10/100/1000BASE-T RJ45+1x1000BASE-X SFP
- -30°C~70°C OT
- Dual DC9-56V
- 4KV anti-static protection
- Maximum Frame 10K, 12G backplane bandwidth
- Optical port can provide SFP
- MDI/MDIX automatic recognition

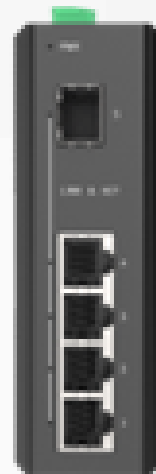

#### Overview

- High Reliability and Stability
- Ease to Maintain
- Heat Resistant
- Strong Anti-electromagnetic
- Anti-vibration
- Low Power Consumption



Address:  
B-G-3A, Endah Promenade No. 5,  
Jalan 3/149E, Taman Sri Endah,  
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




[sales@sentinel systems.com.my](mailto:sales@sentinel systems.com.my)

# Specifications

| Hardware Features     |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Product               | FR-6N3104                                                          |
| Ports                 | 4x10/100/1000Base-TX Ports(RJ45 connector) 1x1000Base-FX (SFP/1x9) |
| Transmission Mode     | Store and Forward (full/half duplex mode)                          |
| Exchange Property     | Delay time: < 7μs Backplane bandwidth: 12Gbps                      |
| Dimensions            | 120mm x 90mm x35mm (L x W x H)                                     |
| Operating Temperature | -20°C~70°C (-4 to 158 °F)                                          |
| Storage Temperature   | -40~85°C(-40 to 185°F)                                             |
| Operating Humidity    | 5%~90% (non-condensing)                                            |

## Dimensions

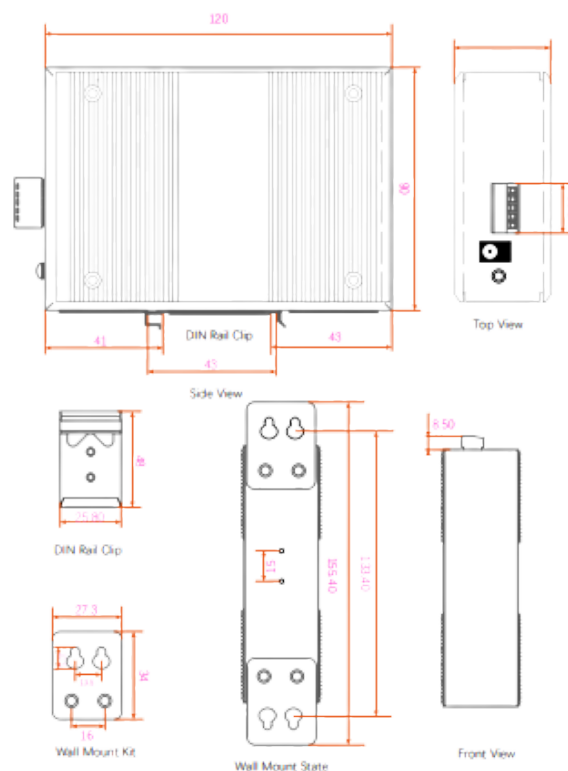

Address:  
B-G-3A, Endah Promenade No. 5,  
Jalan 3/149E, Taman Sri Endah,  
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my