

UNMANAGED INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7N1005P

Main Features

- 5x10/100BASE-TX RJ45,
- -40°C~75°C OT,
- Dual DC9-56V, Port 1 to 4 POE+ Standard
- Full/Half-duplex self-adaptation
- MDI/MDIX automatic recognition
- Optionally support IEEE 802.3af/at PoE Standard



Overview


- Fanless Design
- Resistant to Salt Fog
- Heat Resistant
- Shock-proof
- Anti-vibration
- Low Power Consumption



Specifications

Hardware Features	
Product	FR-7N1005P
Ports	5x10/100Base-TX Port(RJ45)
Transmission Mode	Store and Forward (full/half duplex mode)
Exchange Property	Backplane bandwidth: 1.25G
PoE Ports	Port 1 to 4 IEEE802.3af/at @PoE+
Dimensions	120mm*90mm*35mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)
Power Consumption	3 Watts Max(without PoE load)

Dimensions

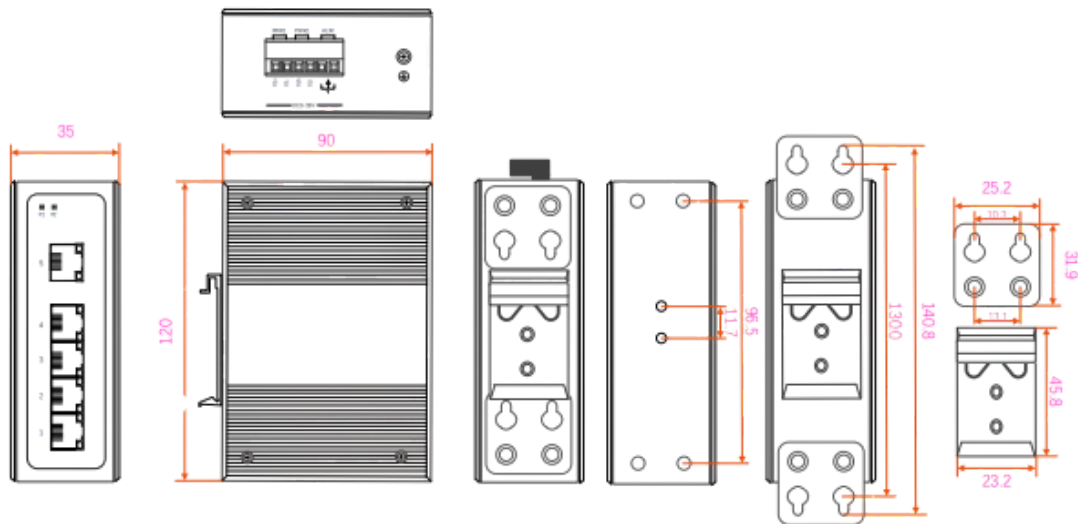

Accessories(Sold Separately)



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my