

UNMANAGED INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7N1101

Main Features

- 1x10/100BASE-TX RJ45+1x100BASE-X SFP
- -40°C~75°C OT
- Dual DC9-56V
- Either DIN rail or Wall Mount installation
- Optionally support IEEE 802.3af/at/bt PoE



Overview

- High Reliability and Stability
- Ease to Maintain
- Heat Resistant
- Shock-proof
- Anti-vibration
- Low Power Consumption



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinelssystem.com.my

Specifications

Hardware Features	
Product	FR-7N1101
RJ45 Port	1x10/100Base-TX
Optical Port	1x100Base-X SFP/1x9
PoE Ports	IEEE802.3af/at @PoE+
Power Consumption	Single Channel: 2 Watts Max(without PoE load) Dual Channel: 4 watts Max(without PoE load)
Dimensions	120mm*90mm*35mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)

Dimensions

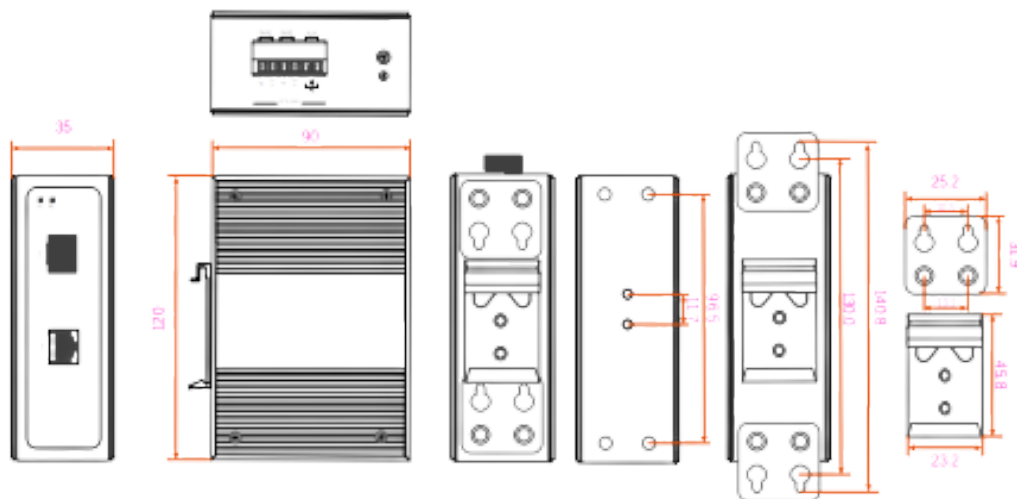

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystems.com.my