

UNMANAGED INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7N1104

Main Features

- 4x10/100BASE-TX
RJ45+1x100BASE-X SFP Slot
- -40°C~75°C OT,
- Dual DC9-56V
- Auto-MDI/MDIX
- Non-blocking switching
architecture



Overview

- Quick Integration
- Heat Resistant
- Saving Costs
- Reliable Performance
- Low Power Consumption



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-7N1104
Copper Ports	4x10/100BASE-TX RJ45 Auto-MDI/MDI-X (Port 1-4)
Fiber Port	1x100BASE-X SFP Slot (Port 5)
Switch Architecture	Store-and-Forward
Forwarding Rate	0.74 Mpps(64-byte packet size)
Dimensions	120mm*90mm*35mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)
Power Consumption	5 Watts Max(without PoE load)

Dimensions

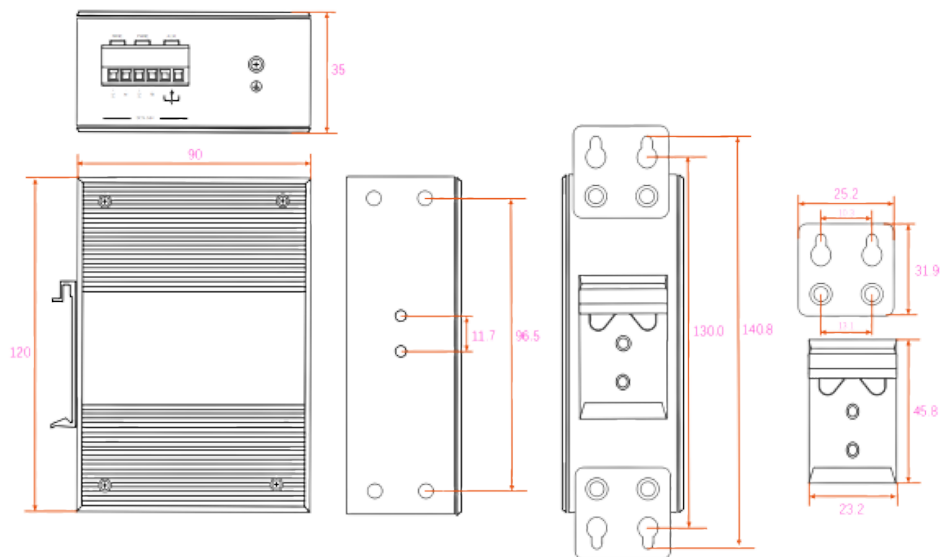

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my