

UNMANAGED INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7N3104

Main Features

- 4x10/100/1000BASE-T RJ45+1x1000BASE-X SFP Slot
- -40°C~75°C OT,
- Dual DC9-56V
- Provide SC/FC/ST/LC interface fiber port
- Support single/dual fiber transmission
- Power input polarity protection design



Overview

- Easy to Maintain
- Heat Resistant
- Saving Costs
- Reliable Performance
- Low Power Consumption



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-7N3104
RJ45 Port	1x10/100/1000Base-TX
Fiber Port	1x1000Base-FX SFP
Transmission Mode	Store-and-Forward
Exchange Property	Delay time: < 7ps Backplane bandwidth: 10Gbps; Packet forwarding rate: 7.44Mpps
Dimensions	120mm*90mm*35mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Cooling Mode	Natural cooling, no fan design
Power Consumption	Full-load<15W

Dimensions

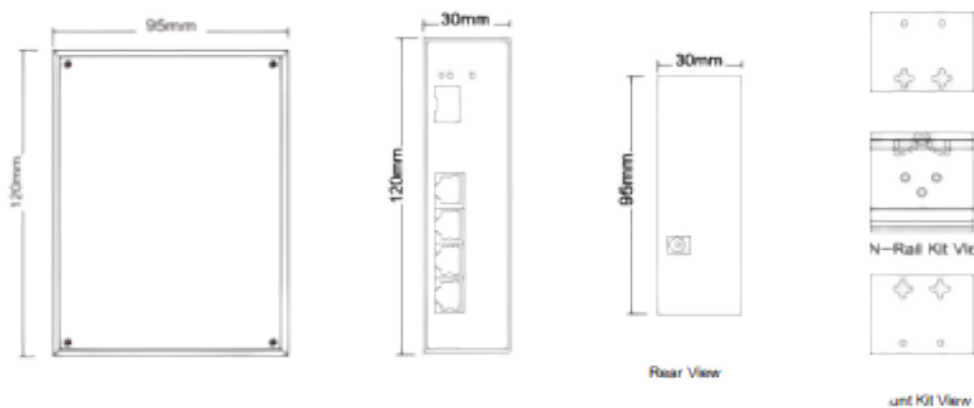

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinelssystems.com.my