

UNMANAGED INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7N3104P

Main Features

- 4x10/100/1000BASE-T RJ45+1x1000BASE-X SFP Slot
- -40°C~75°C OT
- Dual DC9-56V
- Port 1 to 4 POE+ Standard
- Auto-MDI/MDIX
- IEEE 802.1Q VLAN Transparency



Overview

- Easy to Maintain
- Heat Resistant
- Reliable Performance
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-7N3104P
Copper Ports	4x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-4)
Fiber Port	1x1000BASE-X SFP slot (Port 5)
Transmission Mode	Store-and-Forward
Forwarding Rate	7.44 Mpps(64-byte packet size)
Dimensions	120mm*90mm*35mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Power Consumption	Full-load<15W

Dimensions

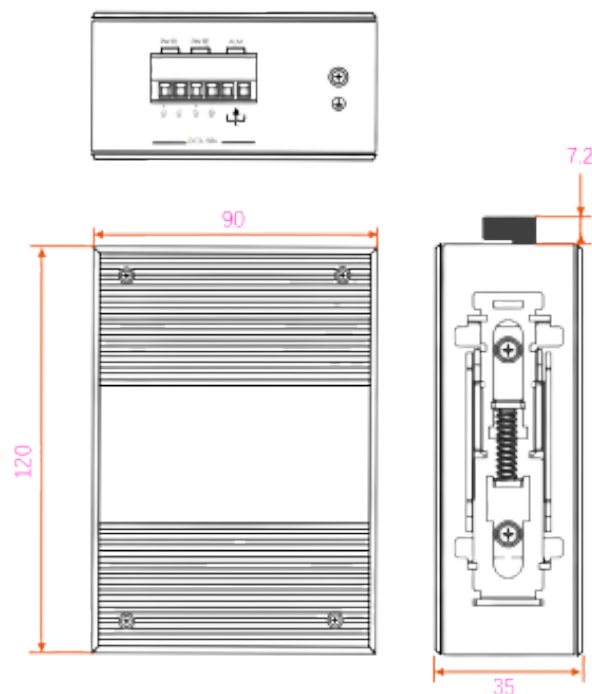

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my