

WEB SMART INDUSTRIAL (PoE) ETHERNET SWITCH

FR-7S3204

Main Features

- 4x10/100/1000BASE-T RJ45+2xGigabit SFP Slots
- -40°C~75°C OT
- Dual DC9-56V
- DIP Switch and Web Management
- Detailed status indicator, working state at a glance



Overview

- Easy to Maintenance
- High Reliability and Stability
- Heat Resistant
- Cost Effective
- Low Power Consumption
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-7S3204
Ports	4x10/100/1000Base-TX RJ45 ports+2x100/1000Base-X SFP ports
Exchange Property	Delay time: < 7μs Backplane bandwidth: 20Gbps
Transmission Mode	Store-and-Forward
Dimensions	120mm x 90mm x 35mm (L x W x H)
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)
Heat Dissipation	34 BTU/h (Non-PoE Mode) 1262 BTU/h (with 360W PoE Load)

Dimensions

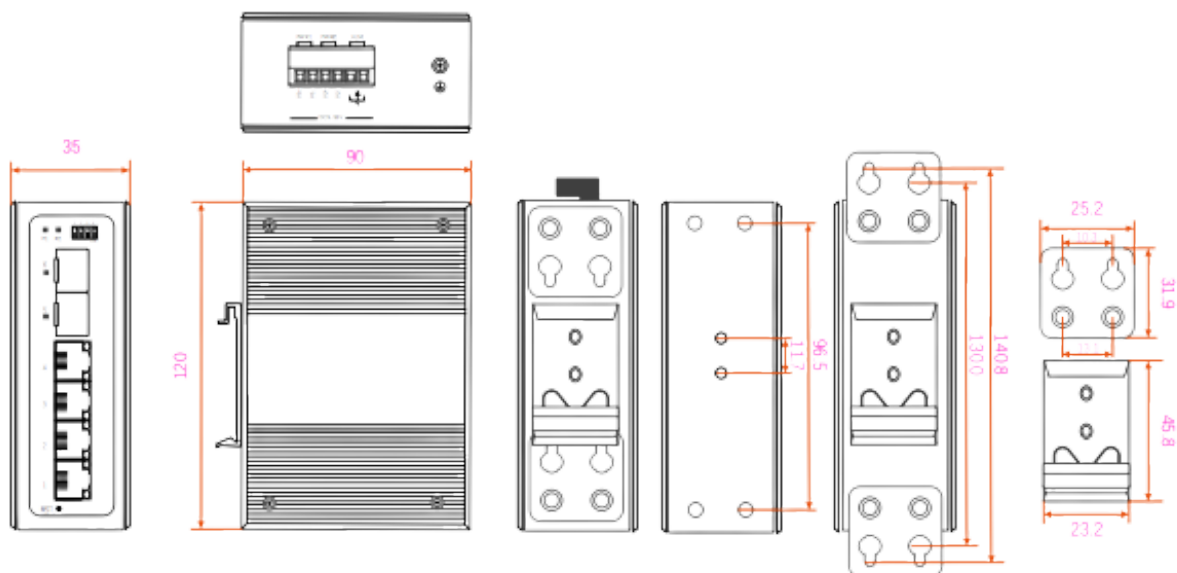

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my