

LAYER 2+ MANAGED INDUSTRIAL ETHERNET SWITCH

FR-9M34F8



Main Features

- 8x10/100/1000BASE-T RJ45+16x100/1000BASE-X SFP+4xGigabit Combo SFP/RJ45
- -40°C~75°C OT
- Dual DC9-56V, Web/CLI/SNMP
- Build up a redundant network with STP/RSTP/ERPSv2
- Electric 8KV surge protection
- Complete status indicator

Overview


- Easy to Maintenance
- Anti-electromagnetic Interference
- Heat Resistant
- Antivibration
- Resilient to Extreme Conditions



Specifications

Hardware Features	
Product	FR-9M34F8
Ports	8×10/100/1000Base-TX 16×1000Base-X SFP 4xGigabit Combo(SFP/RJ45)
Exchange Property	Delay time: < 7μs Backplane bandwidth: 56Gbps
Transmission Mode	Store-and-forward
Dimensions	400mmx300mmx45mm
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)
Cooling	Passive Cooling, Fanless Design

Dimensions

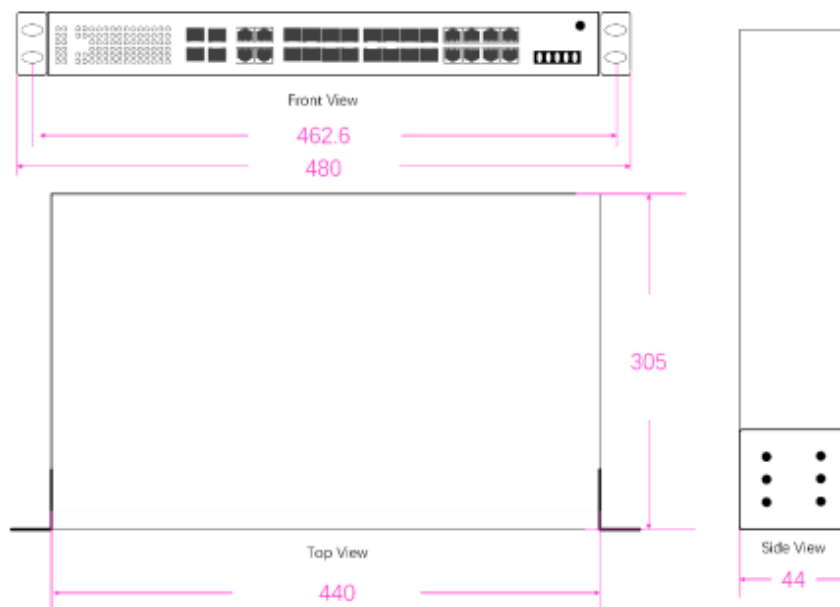

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my