

UNMANAGED INDUSTRIAL ETHERNET SWITCH

FR-9N3224

Main Features

- 24x10/100/1000BASE-T RJ45+2xGigabit SFP Slots
- -40°C~75°C OT
- DC9-56V
- 1RU Rack Mounting



Overview

- High Reliability and Stability
- Heat Resistant
- Low Power Consumption
- Resilient to Extreme Conditions



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-9N3224
PoE Ports	Port 1 to 4 IEEE802.3af/at/bt @PoE++
Exchange Property	Delay time: < 7μs Backplane bandwidth: 20Gbps
Transmission Mode	Store-and-Forward
Dimensions	120mm x 90mm x 35mm (L x W x H)
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40~85°C(-40 to 185°F)
Operating Humidity	5%~90% (non-condensing)
Total PWR/Input Voltage	150W(DC52-56V) (Model dependent)

Dimensions

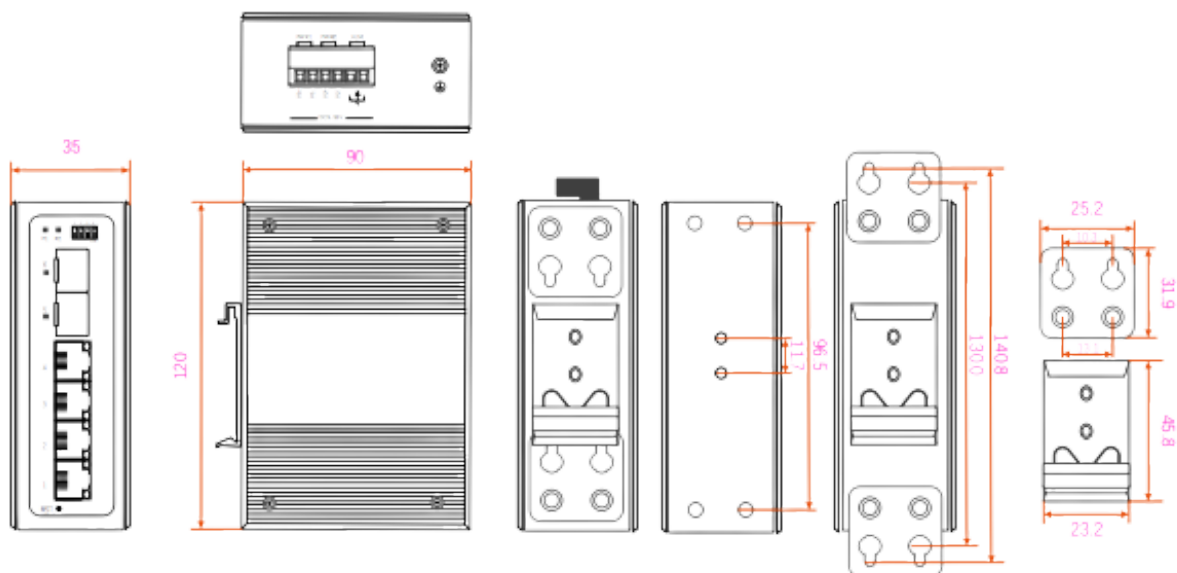

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my