

PoE Media Converter FR-POE232

Main Features

- 1x 10/100/1000Base-T RJ45+1x 1000Base-X SFP Slot,
- 0°C~50°C OT, Included External Power Supply, DC48-56V Power Input,PoE+ Standard
- Deliver Up to 30W of Power Per Port



Overview


- Fiber Flexibility
- Space Saving
- High-efficiency External Power
- Cost Effective
- No Configuration Required



Specifications

Hardware Features	
Product	FR-POE232
Copper Port	1 x 10/100/1000BASE-T Ethernet TP interface
Fiber Port	1x 1000BASE-X
Transmitter Power	-9 to -3 dBm
Transmission Mode	Store-and-Forward
Transmission Distance	550m
Flow Control	Back pressure for half duplex mode IEEE 802.3x pause frame for full duplex mode
Dimension	94x71x26mm
Power Supply	DC52V Input, external AC to DC adapter
Operating Temperature	0 to +50°C (32 to +122°F)
Heat Dissipation	113 BTU/h (with 30W PoE)
Cooling	Passive Cooling

Dimensions

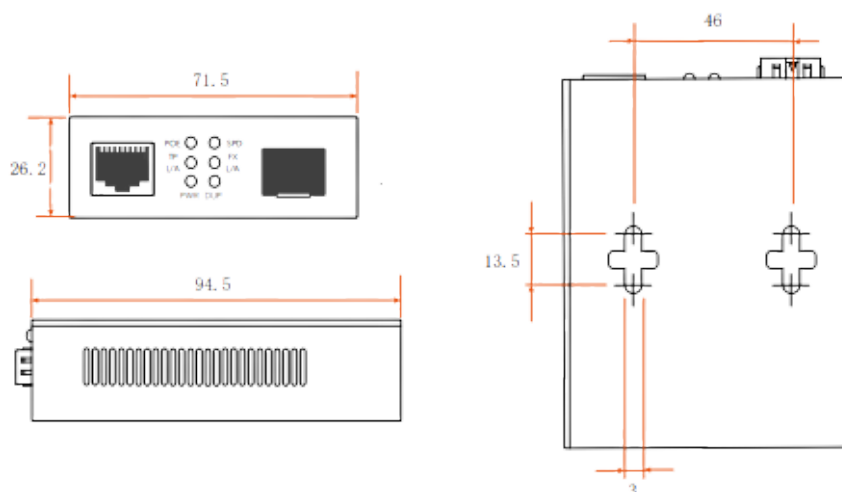

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my