

FIBERROAD
PoE Media Converter
FR-POE233

Main Features

- 2x 10/100/1000Base-TX RJ45+1x 1000Base-X SFP Slot,
- 0°C~50°C OT, Included External Power Supply, DC48-56V Power Input, PoE+ Standard
- Supports Up to 30 W On Each PoE Port



Overview

- Fiber Flexibility
- High-efficiency External Power
- Cost Effective
- No Configuration Required



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinel systems.com.my

Specifications

Hardware Features	
Product	FR-POE233
Copper Port	2 x 10/100/1000BASE-T Ethernet TP interface
Fiber Port	1x 1000BASE-X
Transmitter Power	-9 to -3 dBm
Transmission Mode	Store-and-Forward
Flow Control	Back pressure for half duplex mode IEEE 802.3x pause frame for full duplex mode
Dimension	94x71x26mm
Operating Temperature	0 to +50°C (32 to +122°F)
Humidity	5% to 90% (non-condensing)
Heat Dissipation	113 BTU/h (with 30W PoE)
Cooling	Passive Cooling

Dimensions

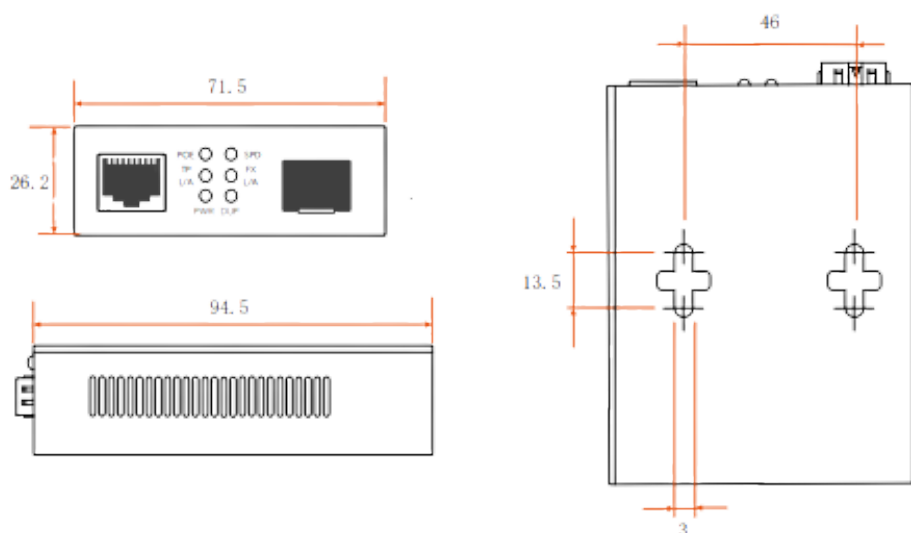

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd



sales@sentinel systems.com.my