

FIBERROAD
PoE Media Converter
FR-POE332

Main Features

- 1×10/100Base-Tx RJ45+1x 100Base-TX SFP Slot,
- 0°C~50°C OT, Internal Power Supply, AC100-240V Input,
- PoE+ Standard
- Compatible with both Fast Ethernet and Gigabit Ethernet
- Link Fault Pass-Through (LFP)
- PD Remote Reset via DIP Switch
- Commercial-Grade Reliability



Overview

- Fiber Flexibility
- Space Saving
- High-efficiency External Power
- Cost Effective



Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.



018-3366566



Sentinel Systems Sdn Bhd




sales@sentinelssystems.com.my

Specifications

Hardware Features	
Product	FR-POE332
Copper Port	1 x 10/100/1000BASE-T RJ45
Fiber Port	1x 1000BASE-X
Transmission Mode	Store-and-Forward
Flow Control	Back pressure for half duplex mode IEEE 802.3x pause frame for full duplex mode
Dimension	140x110x40mm
Power Supply	100 - 240V AC 50/60Hz
Power Output	52V DC, 30 watts, max
Operating Temperature	0 to +50°C (32 to +122°F)
Humidity	5% to 90% (non-condensing)
Heat Dissipation	113 BTU/h (with 30W PoE)
Storage Temperature	-20 to +70°C (-4 to +158°F)

Dimensions

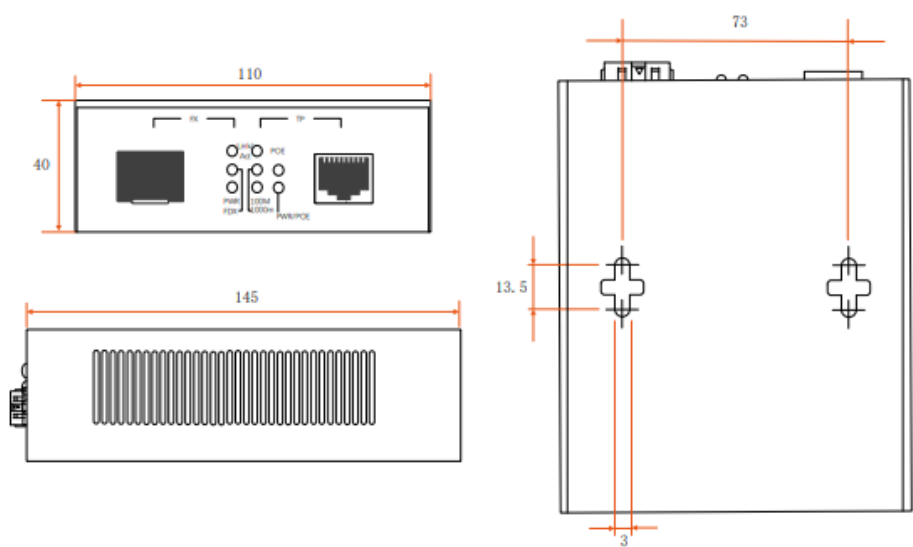

Address:
B-G-3A, Endah Promenade No. 5,
Jalan 3/149E, Taman Sri Endah,
Sri Petaling, 57000 Kuala Lumpur.

018-3366566
Sentinel Systems Sdn Bhd
sales@sentinel systems.com.my