

UHF RFID Reader TT-301F




Overview

-  Cost Effective
-  Excellent Consistency
-  Stable Reading Performance
-  Waterproof Shell Design Grade IP65
-  Low Operating Current & Long Service Life



Parameters	Description
Model	TT-301F
Protocol Standard	EPCGlobal UHF Class 1 Gen 2 / ISO 18000-6C
Frequency	919 - 923 MHz Frequency
Communication Interface	Wiegand, RS-485, USB 2.0 x 1,
Working Voltage	DC 9 - 15V
Working Current	Standby current less than 400mA, swipe current less than 3A
Sensing Distance	5 Meter
Working Temperature	-20°C ~ +60°C
Storage Temperature	-20°C ~ +80°C
Working Humidity	15% ~ 90%
Data Output Format	WG26, WG34, RS-485
Size Dimension	220mm x 220mm x 40mm (tolerance ± 0.5)


Dimension

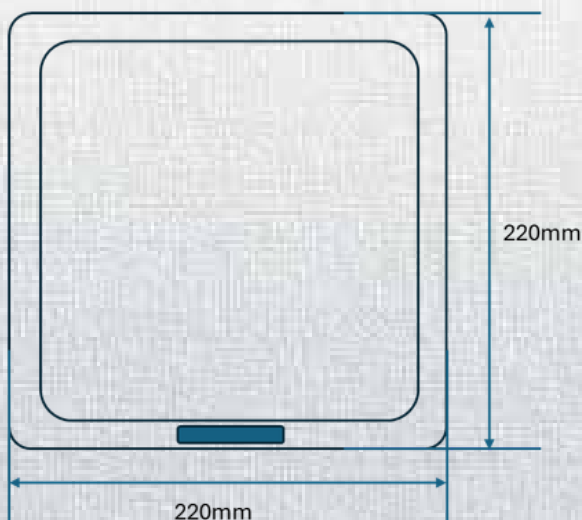

Front View



Side View

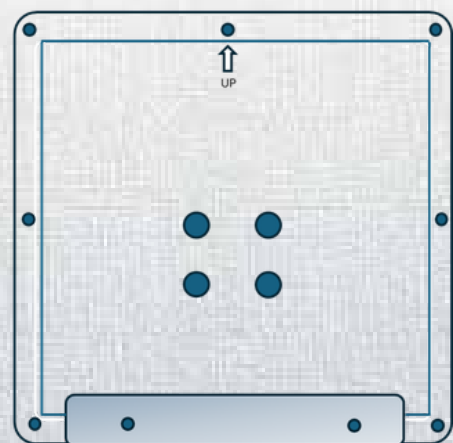

Rear View

